


# Quick User Manual

Uso del Monitor ZD32-4K

## 1. Key Function Description

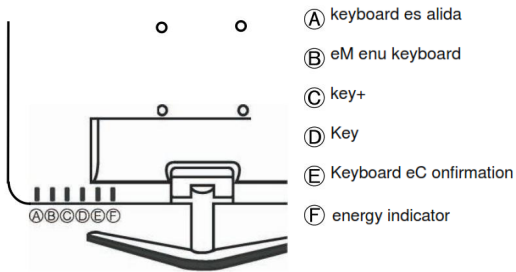

## 2. Operating Instructions

1. turns on automatically


Channel selection: press key A, press key B to select signal channel, then press 2. key E to confirm, finally press key A to exit

Picture Effect Design: Press B key to enter menu, and press B key continuously to 3. select the different options, press C+ and D- key to adjust, then press E key to confirm and finally press A key to exit

## 3. Basic Parameters

Model	ZD32-4K
Screen size	32"
resolution	3840 * 2160
Backlight	LCD
Brightness	500 cd/m <sup>2</sup>
Contrast	3000:1
input signal	HDMI / VGA / USB / AV
Consumption	50W
Feeding	AC110-220V
Operating Temperature	0-30°
Package Dimensions	765 * 500 * 110 (mm)

## 4. Interface Function Chart

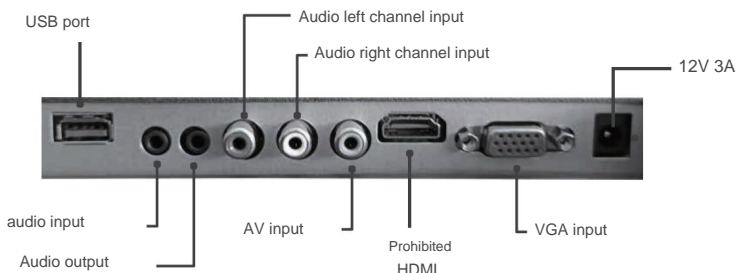

Mark "only for safe use in non-tropical climate"



It marks "only for safe use in areas below 2000m above sea level".

### Warranty card

Username	
mail	
Address	
Postal Code	
Contact number	
Product name	
Model	
Serial number / Distributor	
Name	
Address	
Contact number	
Postal Code	
sale date	
Invoice sheet	





[www.zkteco.com](http://www.zkteco.com)



[www.zktecolatinoamerica.com](http://www.zktecolatinoamerica.com)



Copyright © 2022, ZKTeco CO., LTD. All rights reserved.  
ZKTeco may, at any time and without prior notice, make changes or improvements to products and services or stop their production or marketing.  
ZKTeco logo and brand are owned by ZKTeco CO., LTD.