

**1** IPHelper



<http://downloadstore.boschsecurity.com/>




**2** Lens Wizard

Configuration >> Camera >> Installer Menu

Installer Menu

Base frame rate: 30 fps

Video format:  H264  H265

Camera LED:  Enabled  Disabled

Recommended 0°

Image rotation: 90°

Mirror image:  On  Off

Button WDR/L:  Enabled  Disabled

Audio output: 16.9 pillarbox

Reboot device:

Factory defaults:

**3** Zoom & Focus

Set lens to default position


Optical zoom:

Autofocus:


Focus position: 92

Focus indicator:


Lens type:  IR-corrected lens

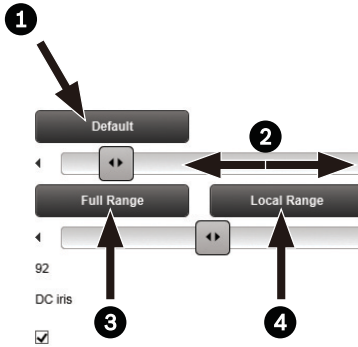

**4** View & Configure



<http://downloadstore.boschsecurity.com/>



**FLEXIDOME IP 4000i/5000i**

NDI-4502-A | NDI-4502-AL  
NDI-5503-A | NDI-5503-AL



**Quick Installation Guide**

Bosch Security Systems B.V.  
Torenallee 49  
5617 BA Eindhoven  
The Netherlands  
[www.boschsecurity.com](http://www.boschsecurity.com)  
© Bosch Security Systems B.V., 2017

