

2 | Specifications

| | |
|-------------------------------------|---|
| Dimensions | 37 cm x 32 cm x 8.9 cm (14.5 in x 12.5 in x 3.5 in) |
| Color | White |
| Compatible Lockset (optional) | D101 Lock and Key Set |
| Compatible Tamper Switch (optional) | ICP-EZTS Tamper Switch D110 Tamper Switch |
| Material | 1.0 mm (20 gauge) cold-rolled steel |

DE-de: Für Dokumentation in Ihrer Sprache, klicken Sie hier <https://de.boschsecurity.com/de>
El-gr: Μεταβείτε στη διεύθυνση <https://gr.boschsecurity.com/el/> για την τεκμηρίωση σε αυτήν τη γλώσσα.
Es-es: Visite <https://es.boschsecurity.com/es/> para obtener documentación en este idioma.
Fr-fr: Accédez à l'adresse <https://fr.boschsecurity.com/fr/> pour obtenir la documentation dans cette langue.
Hu-hu: A honosított dokumentációt lásd a <https://hu.boschsecurity.com/hu/> oldalon.
It-it: Andare a <https://it.boschsecurity.com/it/> per la documentazione in questa lingua.
Nl-nl: Voor de documentatie in uw taal, ga naar <https://www.boschsecurity.com/nl/nl>
Pl-pl: Dokumentacja w tym języku znajduje się w witrynie <https://pl.boschsecurity.com/pl/>
Pt-br: Acesse <http://pt.boschsecurity.com/pt/> para obter a documentação neste idioma.
SE-sv: For documentation in this language, go to <https://www.boschsecurity.com/xn/en/>

Reading Bosch Security Systems, Inc. Product Date Codes

For Product Date Code information, refer to the Bosch Security Systems, Inc. Web site at: <http://www.boschsecurity.com/datecodes/>.



Medium Control Panel Enclosure B10




en Installation Guide



1 | Overview

This enclosure is compatible with select Bosch intrusion products, and can hold up to two batteries.

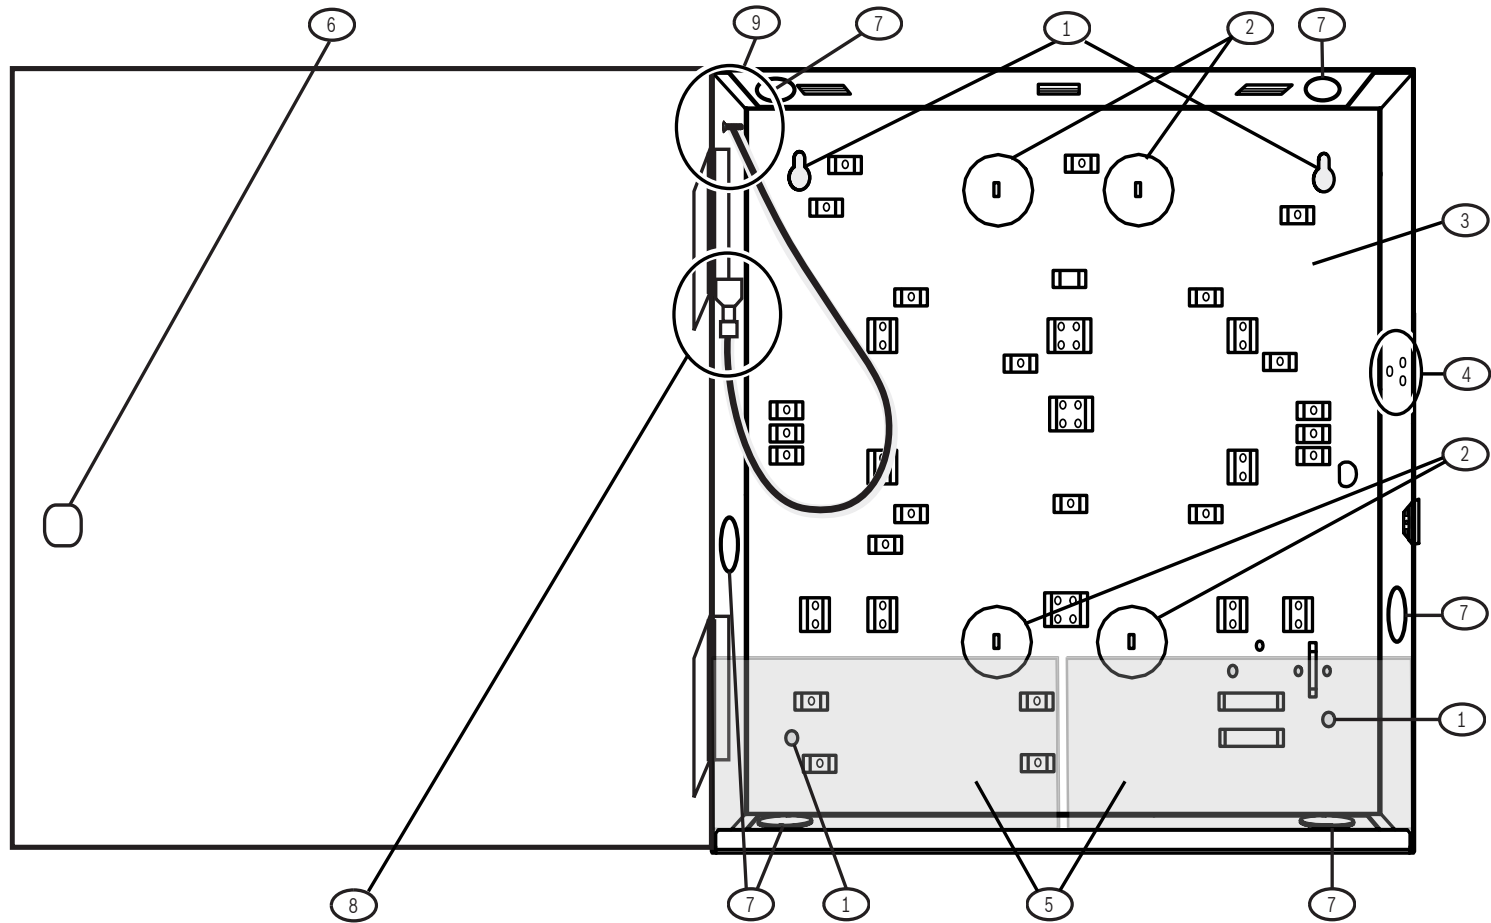

| Callout | Description |
|---------|--|
| 1 | Enclosure mounting holes (4). Bosch recommends using #10 screws and wall anchors to install. |
| 2 | Wire knockouts (4) |
| 3 | Control panel mounting location |
| 4 | Tamper switch mounting location |
| 5 | Battery mounting location (up to 2 - 7Ah batteries) |
| 6 | Lockset mounting location |
| 7 | Conduit knockouts (6) 4 - 12.7mm (1/2in), 2 - 19.05mm (3/4 in) |
| 8 | Grounding (bonding) connection to enclosure door |
| 9 | Grounding (bonding) connection for door only. Do not connect any other wires to this lug. |